



**Declaration Owner**

BlueScope Buildings North America, Inc.  
1540 Genessee St  
Kansas City, MO 64102  
Phone: (816) 968-3001  
Email: [info@bsbna.com](mailto:info@bsbna.com)  
<https://bluescopebuildings.com/>

**Product:**

Galvanized Steel LongBay

**Declared Unit**

The declared unit is one metric ton of steel LongBay produced across three BlueScope Buildings North America, Inc. facilities

**EPD Number and Period of Validity**

SCS-EPD-10179  
EPD Valid June 6, 2024 through June 5, 2029

**Product Category Rule**



PCR Guidance for Version 4.0. UL Environment. March 2022.

PCR Guidance for Building-Related Products and Services. Part B:  
Designated Steel Construction Product EPD Requirements. UL  
Environment. August 2020.

**Program Operator**

SCS Global Services  
2000 Powell Street, Ste. 600, Emeryville, CA 94608  
+1.510.452.8000 | [www.SCSglobalServices.com](http://www.SCSglobalServices.com)



|   |   |  |
|---|---|--|
| Declaration owner:  | BlueScope Buildings North America, Inc.   |  |
| Address:  | 1540 Genessee St, Kansas City, MO 64102, USA  |  |
| Declaration Number:   | SCS-EPD-10179   |  |
| Declaration Validity Period:  | EPD Valid June 6, 2024 through June 5, 2029   |  |
| Program Operator:   | SCS Global Services   |  |
| Declaration URL Link:   | <a href="https://www.scsglobalservices.com/certified-green-products-guide">https://www.scsglobalservices.com/certified-green-products-guide</a>   |  |
| LCA Practitioner:   | Tess Garvey, Ph.D., SCS Global Services   |  |
| LCA Software and LCI database:  | OpenLCA 2.0 software and the Ecoinvent v3.9.1 database  |  |
| Product's Intended Application:   | LongBay is used in the construction of roof secondary structures  |  |
| Product RSL:  | n/a   |  |
| Markets of Applicability:   | Global  |  |
| EPD Type:   | Product-Specific  |  |
| EPD Scope:  | Cradle-to-Gate  |  |
| LCIA Method and Version:  | IPCC AR5 and TRACI 2.1  |  |
| Independent critical review of the LCA and data, according to ISO 14044 and ISO 14071                           | <input type="checkbox"/> internal   | <input checked="" type="checkbox"/> external |
| LCA Reviewer:   | <br>Lindita Bushi, Ph.D., Athena Sustainable Materials Institute  |  |
| Part A Product Category Rule:   | PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 4.0. UL Environment. March 2022.   |  |
| Part A PCR Review conducted by:   | Lindita Bushi, PhD (Chair); Hugues Imbeault-Tétreault, ing., M.Sc.A.; Jack Geibig   |  |
| Part B Product Category Rule:   | PCR Guidance for Building-Related Products and Services. Part B: Designated Steel Construction Product EPD Requirements. UL Environment. August 2020.   |  |
| Part B PCR Review conducted by:   | Thomas Gloria, PhD; Brandie Sebastian, James Littlefield  |  |
| Independent verification of the declaration and data, according to ISO 21930:2017, UL Part A and ISO 14025:2006 | <input type="checkbox"/> internal   | <input checked="" type="checkbox"/> external |
| EPD Verifier:   | <br>Lindita Bushi, Ph.D., Athena Sustainable Materials Institute  |  |
| Declaration Contents:   | 1. BlueScope Buildings North America, Inc. .... 2<br>2. Products..... 2<br>3. LCA: Calculation Rules..... 5<br>4. LCA: Scenarios and Additional Technical Information ..... 9<br>5. LCA: Results..... 10<br>6. LCA: Interpretation ..... 13<br>7. Additional Environmental Information..... 14<br>8. References..... 15 |  |

**Disclaimers:** This EPD conforms to ISO 14025, 14040, 14044, and ISO 21930.

**Scope of Results Reported:** The PCR requirements limit the scope of the LCA metrics such that the results exclude environmental and social performance benchmarks and thresholds, and exclude impacts from the depletion of natural resources, land use ecological impacts, ocean impacts related to greenhouse gas emissions, risks from hazardous wastes and impacts linked to hazardous chemical emissions.

**Accuracy of Results:** Due to PCR constraints, this EPD provides estimations of potential impacts that are inherently limited in terms of accuracy.

**Comparability:** The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

In accordance with ISO 21930:2017, EPDs are comparable only if they comply with the core PCR, use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works.


## 1. BlueScope Buildings North America, Inc.

BlueScope Buildings North America, Inc. (“BBNA”) is a business unit of BlueScope Steel Ltd. and an international steel solutions company with global presence. Operating in North America with more than 2,000 employees, BlueScope Buildings North America, Inc. is the leader in customized and fully-engineered steel buildings solutions. Headquartered in Kansas City, Missouri, BBNA is backed by notable brands and seven manufacturing facilities.

## 2. Products

### 2.1 PRODUCT DESCRIPTION

This EPD is for the LongBay galvanized truss system, herein referred to as “LongBay,”, manufactured by BBNA across three facilities, including Annville, PA, Monterrey, MX, and St. Joseph, MO. The LongBay is branded by Butler and Varco Pruden as Butler Truss PurlinXT™ and Varco Pruden WideBay™. The sizes produced generally are customized and specific to the project. Long-bay secondary structural framing systems are assembled using acrylic-coated coils for top and bottom chords. The open web uses acrylic-coated, galvanized tubes. Both elements are bolted together to form the LongBay. These elements are used for larger spans or bays when the building design requires. The applicable CSI code is 051200 Structural Steel Framing. The average density of the products is 7,850 kg/m<sup>3</sup>.

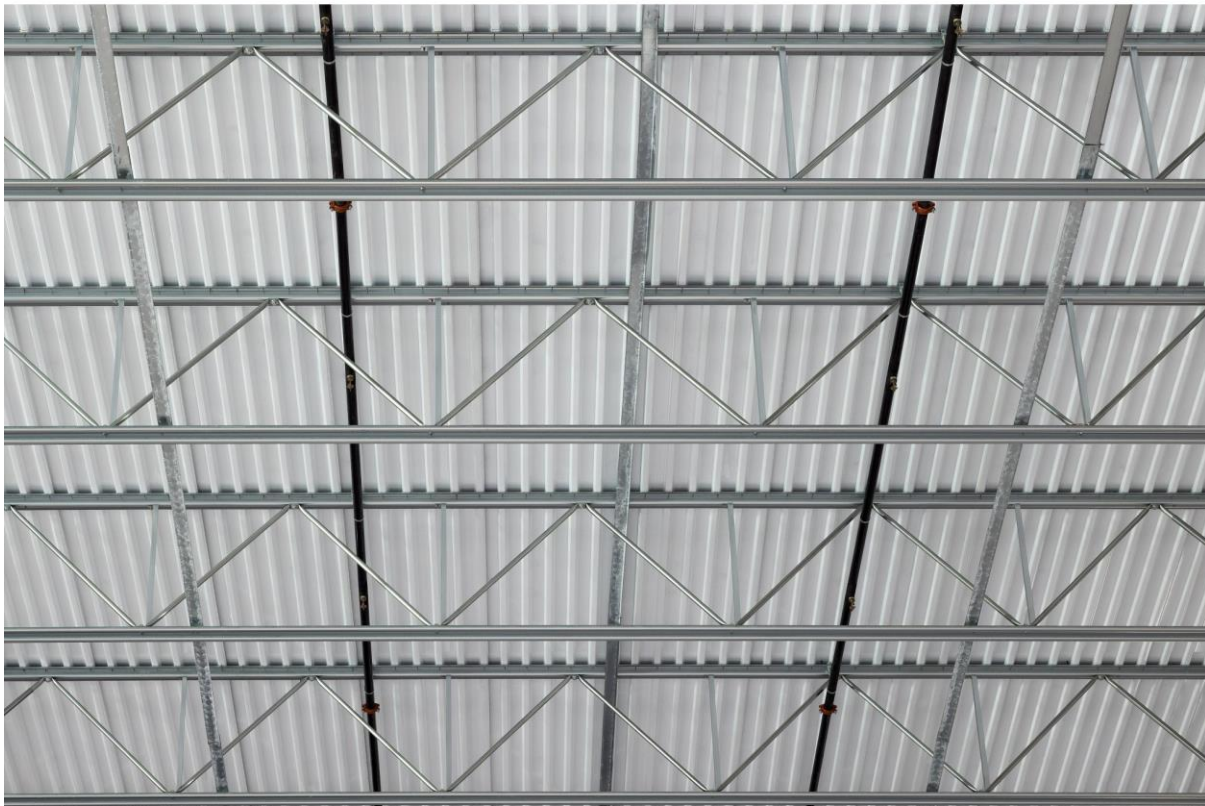

## 2.2 PRODUCT FLOW DIAGRAM

A flow diagram illustrating the production processes and life cycle phases included in the scope of the EPD is provided below.

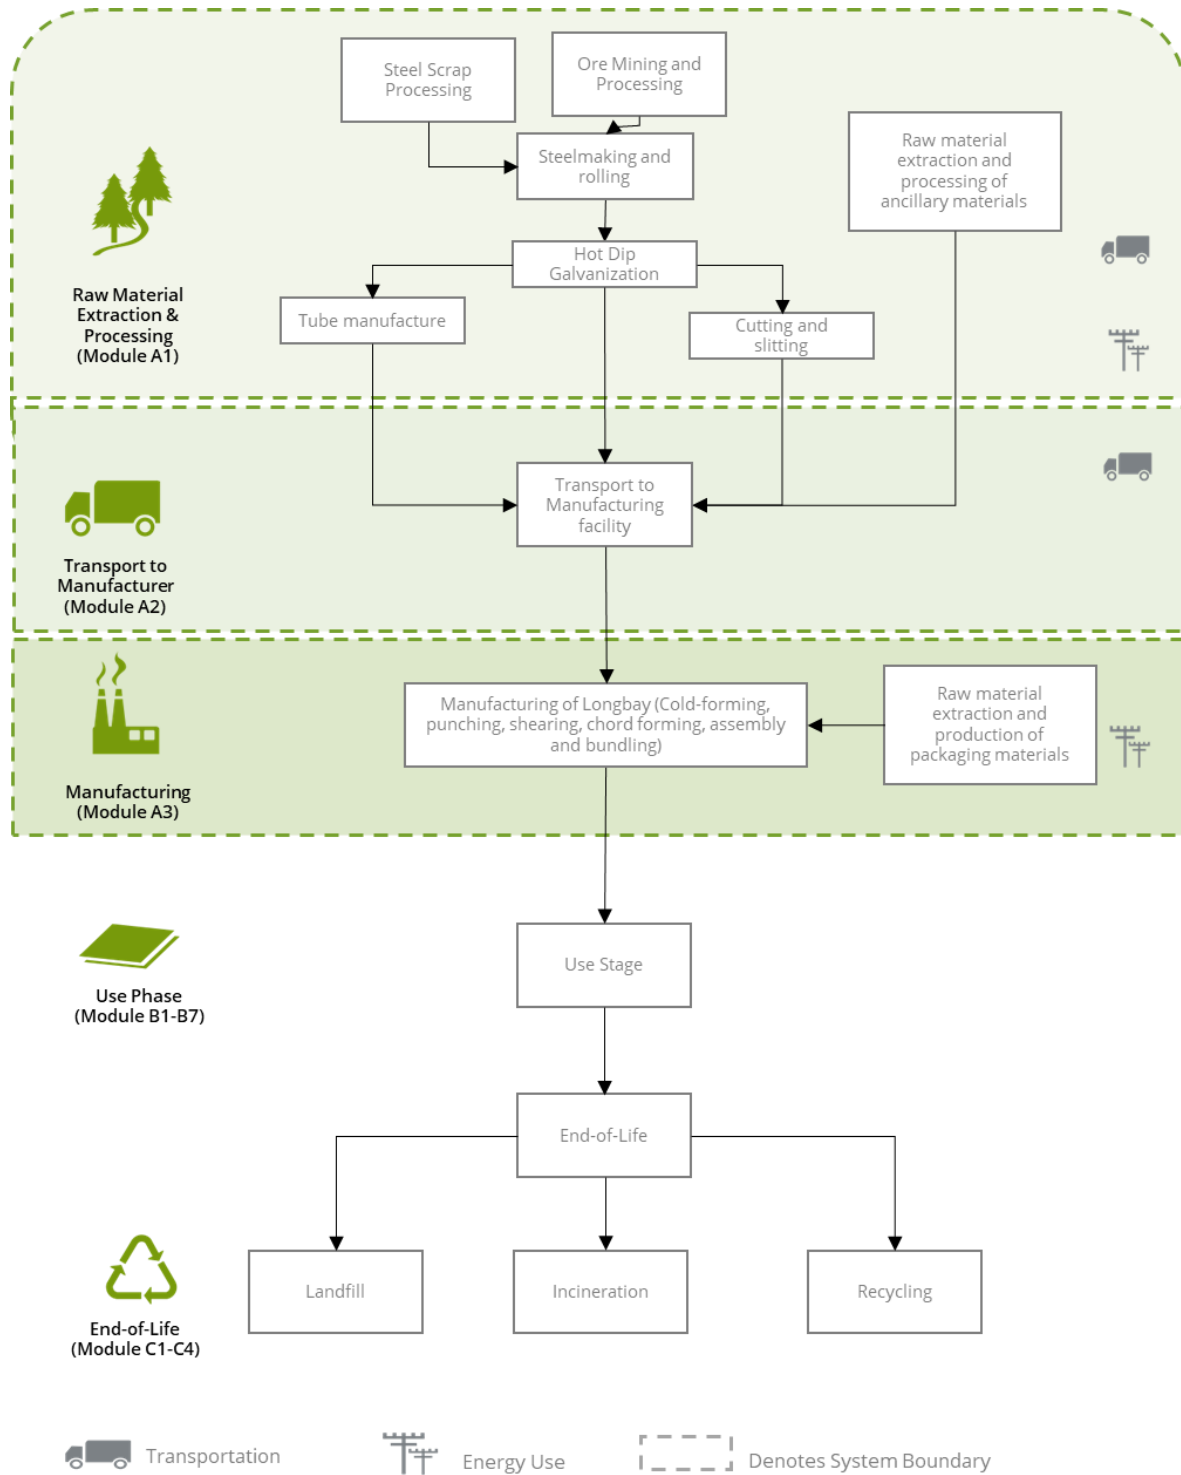


Figure 1. Flow Diagram for the life cycle of the BBNA LongBay

**2.3 DECLARATION OF METHODOLOGICAL FRAMEWORK**

The scope of the EPD is cradle-to-gate, including raw material extraction and processing, steelmaking and intermediate steel product manufacture, coating, transportation to the BBNA facilities, and final product manufacturing at three facilities owned and operated by BBNA: Annville, PA, Monterrey, MX, and St. Joseph, MO. The life cycle phases included in the product system boundary are shown below.

**Table 1.** Life cycle phases included in the BBNA LongBay product system boundary.

| Product                                |                           |               | Construction Process |                             | Use |             |        |             |               |                        |                       | End-of-life               |           |                  |          | Benefits and loads beyond the system boundary |
|--|---------------------------|---------------|----------------------|-----------------------------|-----|-------------|--------|-------------|---------------|------------------------|-----------------------|---------------------------|-----------|------------------|----------|---|
| A1                                     | A2                        | A3            | A4                   | A5                          | B1  | B1          | B3     | B4          | B5            | B6                     | B7                    | C1                        | C2        | C3               | C4       | D   |
| Raw material extraction and processing | Transport to manufacturer | Manufacturing | Transport            | Construction - installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstruction demolition | Transport | Waste processing | Disposal | Reuse, recovery and/or recycling potential    |
| X                                      | X                         | X             | MND                  | MND                         | MND | MND         | MND    | MND         | MND           | MND                    | MND                   | MND                       | MND       | MND              | MND      | MND   |

X = Module Included | MND = Module Not Declared

Cut-off and allocation procedures are described below and conform to the PCR and ISO standards.

**2.4 TECHNICAL DATA**

Technical specifications for the steel products in this EPD include ASTM A653, A1011 and A1076 for LongBay. The applicable CSI code for the products is 05 12 00 Structural Steel Framing, while the final metal building follows CSI standard CSI 13 34 19.

**2.5 INTENDED APPLICATION**

Galvanized steel LongBay is used in the construction of light roof secondary structures.

**2.6 MATERIAL COMPOSITION**

LongBay made by BBNA is made of galvanized low-alloy carbon steel coils and tubes.

Steel construction products under normal conditions do not present inhalation, ingestion, or contact health hazards. These products are used inside the building envelope, or other structures, and do not include materials or substances which have potential route of exposure to humans or flora/fauna in the environment.

**2.7 PROPERTIES OF DECLARED PRODUCT AS DELIVERED**

Galvanized steel LongBay is produced in various sizes customized and specific to the project. LongBay is produced by BBNA in depths of 30, 34, 40" (0.762, 0.864, and 1.016 m) and lengths of up to 12 to 60 ft (3.66-18.3 m).

## 2.8 MANUFACTURING

Galvanized steel coils and tubes are shipped to three BBNA facilities across North America, including Annville, PA, Monterrey, MX, and St. Joseph, MO. At these facilities, LongBay chords are cold-formed and bolted to pipes to create a light secondary structure solution. Chords, bolts, and web pipes are assembled using galvanized raw material.

## 2.9 PACKAGING

Packaging for LongBay includes minimal wood-based dunnage and steel banding.

## 2.10 FURTHER INFORMATION

Further information on the product can be found on the manufacturers' website at <https://bluescopebuildings.com/>

# 3. LCA: Calculation Rules

## 3.1 DECLARED UNIT

The declared unit used in the EPD is defined as one (1) metric ton of LongBay, consistent with the PCR.

**Table 2.** *The modules and unit processes included in the scope for the BBNA LongBay.*

| Module | Module Description  | Unit Processes Included in Scope  |
|--------|---|---|
| A1     | Extraction and processing of raw materials; any reuse of products or materials from previous product systems; processing of secondary materials; generation of electricity from primary energy resources; energy, or other, recovery processes from secondary fuels | Raw material extraction and processing for the raw materials upstream of the BBNA facilities. Steelmaking, hot rolling of the steel coil or intermediate steel products, as well as any coating or painting done upstream of BBNA operations. |
| A2     | Transport (to the manufacturer)   | Transportation to the three BBNA facilities in Annville, PA, Monterrey, MX, and St. Joseph, MO.   |
| A3     | Manufacturing, including ancillary material production  | LongBay manufacture at the three BBNA facilities.   |
| A4     | Transport (to the building site)  | Module Not Declared   |
| A5     | Construction-installation process   | Module Not Declared   |
| B1     | Product use   | Module Not Declared   |
| B2     | Product maintenance   | Module Not Declared   |
| B3     | Product repair  | Module Not Declared   |
| B4     | Product replacement   | Module Not Declared   |
| B5     | Product refurbishment   | Module Not Declared   |
| B6     | Operational energy use by technical building systems  | Module Not Declared   |
| B7     | Operational water uses by technical building systems  | Module Not Declared   |
| C1     | Deconstruction, demolition  | Module Not Declared   |
| C2     | Transport (to waste processing)   | Module Not Declared   |
| C3     | Waste processing for reuse, recovery and/or recycling   | Module Not Declared   |
| C4     | Disposal  | Module Not Declared   |
| D      | Reuse-recovery-recycling potential  | Module Not Declared   |

### 3.2 UNITS

All data and results are presented using SI units.

### 3.3 ESTIMATES AND ASSUMPTIONS

- Modeling steel relied upon many different assumptions:
  - Product manufacturing beyond hot rolling assumed an 8% scrap rate.
  - BBNA was able to provide the specific steel mill and steelmaking technology where galvanized steel products were sourced from a service center. These steel mills included the North Star electric arc furnace in Delta, Ohio and other electric arc furnace mills in the US. To model the steelmaking, the results were taken from the North Star hot rolled band EPD from 2022, while other EAF steel was modeled using the representative dataset in ecoinvent.
  - Electricity for hot dip galvanization (HDG) coating was assumed to from the eGRID subregion in which the steel was procured from.
  - Representative inventory data for other raw materials were modeled with unit process data taken from Ecoinvent.
  - Representative inventory data for electricity use were modified to reflect the eGRID subregion electricity supply mixes at the BBNA facilities.
  - Transportation for manufacturing wastes was modeled using the EPA WARM model assumption of 20 miles (~32 km), from the point of product use to a landfill, material recovery center, or waste incinerator. Ecoinvent datasets are used to model the impacts associated with incineration and landfilling, which does not include energy recovery from landfill gas.

The PCR requires the results for several inventory flows related to construction products to be reported including energy and resource use and waste and outflows. These are aggregated inventory flows, and do not characterize any potential impact; results should be interpreted considering this limitation.

### 3.4 CUT-OFF RULES

According to the PCR, processes contributing greater than 1% of the total environmental impact indicator for each impact are included in the inventory. No data gaps were allowed which were expected to significantly affect the outcome of the indicator results. No known flows are deliberately excluded from this EPD.

### 3.5 DATA SOURCES

Primary data were provided by BBNA for the three facilities producing LongBay. The sources of secondary LCI data are supplier-specific LCA, EPDs, and the Ecoinvent database.

Table 3. Data sources for the BBNA LongBay.

| Flow  | Dataset   | Data Source                   | Publication Date |
|---|---|-------------------------------|------------------|
| <b>Steel processing</b>                               |   |                               |                  |
| Upstream and third party HDG coating and Cold rolling | LCI for HDG taken from the 2020 AISI report on steel products:<br>Ecoinvent datasets to build LCI of steel:<br>steel production, electric, low-alloyed   Cutoff, U - Europe without Switzerland and Austria * modified for eGRID subregion (RFCW, SRTV, CAMX)<br>steel production, converter, low-alloyed   Cutoff, U - RER* modified for eGRID subregion (RFCW)<br>hot rolling, steel   Cutoff, U - Europe without Austria                           | AISI report                   | 2021             |
|   | market group for electricity, medium voltage   Cutoff, U - US<br>market for natural gas, high pressure   Cutoff, U - US<br>market for hydrochloric acid, without water, in 30% solution state   Cutoff, U - RER<br>market for nitrogen, liquid   Cutoff, U - RER<br>market for zinc   Cutoff, U - GLO<br>process-specific burdens, hazardous waste incineration plant   Cutoff, U - RoW<br>zinc coating, pieces   zinc coat, pieces   Cutoff, U - RER | Ecoinvent 3.9.1               | 2022             |
| Steel hardware  | market for steel, low-alloyed, hot rolled   steel, low-alloyed, hot rolled   Cutoff, U - GLO<br>metal working, average for steel product manufacturing   metal working, average for steel product manufacturing   Cutoff, U - RER   | Ecoinvent 3.9.1               | 2022             |
| <b>Other raw materials and ancillary</b>              |   |                               |                  |
| Lubricating oils                                      | market for lubricating oil   lubricating oil   Cutoff, U - RER  | Ecoinvent 3.9.1               | 2022             |
| <b>Industrial gases</b>                               |   |                               |                  |
| Argon   | market for argon, liquid   argon, liquid   Cutoff, U - RER  | Ecoinvent 3.9.1               | 2022             |
| Acetylene   | market for acetylene   acetylene   Cutoff, U - RER  | Ecoinvent 3.9.1               | 2022             |
| Carbon dioxide  | market for carbon dioxide, liquid   carbon dioxide, liquid   Cutoff, U - RER  | Ecoinvent 3.9.1               | 2022             |
| Oxygen  | market for oxygen, liquid   oxygen, liquid   Cutoff, U - RER  | Ecoinvent 3.9.1               | 2022             |
| <b>Electricity and Fuel Use</b>                       |   |                               |                  |
| Electricity   | market for electricity, medium voltage   electricity, medium voltage   Cutoff, U - various (RFC, MRO, WECC)<br>modified for eGRID subregions (MROE, SRTV, SPNO, CAMX) as appropriate  | Ecoinvent 3.9.1<br>eGRID 2021 | 2022<br>2023     |
|   | market for heat, central or small-scale, natural gas   heat, central or small-scale, natural gas   Cutoff, U - Europe without Switzerland   | Ecoinvent 3.9.1               | 2022             |
| Propane   | market for propane, burned in building machine   propane, burned in building machine   Cutoff, U - GLO  | Ecoinvent 3.9.1               | 2022             |
| Diesel  | market for diesel, burned in agricultural machinery   diesel, burned in agricultural machinery   Cutoff, U - GLO  | Ecoinvent 3.9.1               | 2022             |
| Light fuel oil  | heat production, light fuel oil, at boiler 10kW, non-modulating   heat, central or small-scale, other than natural gas   Cutoff, U - Europe without Switzerland   | Ecoinvent 3.9.1               | 2022             |
| Heavy fuel oil  | market for heavy fuel oil, burned in refinery furnace   heavy fuel oil, burned in refinery furnace   Cutoff, U - GLO  | Ecoinvent 3.9.1               | 2022             |
| <b>Other facility</b>                                 |   |                               |                  |
| Paint wastes  | treatment of waste paint, municipal incineration   waste paint   Cutoff, U - Europe without Switzerland   | Ecoinvent 3.9.1               | 2022             |
|   | treatment of waste paint, inert material landfill   waste paint   Cutoff, U - Europe without Switzerland  |                               |                  |
| Nonhazardous wastes                                   | process-specific burdens, inert material landfill   process-specific burdens, inert material landfill   Cutoff, U - RoW   | Ecoinvent 3.9.1               | 2022             |
|   | process-specific burdens, municipal waste incineration   process-specific burdens, municipal waste incineration   Cutoff, U - Europe without Switzerland  |                               |                  |
| Other Hazardous wastes                                | process-specific burdens, hazardous waste incineration plant   process-specific burdens, hazardous waste incineration plant   Cutoff, U - RoW   | Ecoinvent 3.9.1               | 2022             |
|   | treatment of spent antifreezer liquid, hazardous waste incineration   spent antifreezer liquid   Cutoff, U - RoW<br>treatment of spent solvent mixture, hazardous waste incineration   spent solvent mixture   Cutoff, U - Europe without Switzerland   |                               |                  |
| Used oil treatment                                    | treatment of waste mineral oil, hazardous waste incineration   waste mineral oil   Cutoff, U - Europe without Switzerland   | Ecoinvent 3.9.1               | 2022             |
| <b>Water use at facility</b>                          |   |                               |                  |
| Water use   | tap water production, conventional treatment   tap water   Cutoff, U - RoW  | Ecoinvent 3.9.1               | 2022             |
| <b>Transportation</b>                                 |   |                               |                  |
| Truck transport                                       | transport, freight, lorry 16-32 metric ton, EURO4   transport, freight, lorry 16-32 metric ton, EURO4   Cutoff, U - RER   | Ecoinvent 3.9.1               | 2022             |
| Rail transport  | market for transport, freight train   transport, freight train   Cutoff, U - US   | Ecoinvent3.9.1                | 2022             |

### 3.6 DATA QUALITY

The data quality assessment addressed the following parameters: time-related coverage, geographical coverage, technological coverage, precision, completeness, representativeness, consistency, reproducibility, sources of data, and uncertainty.

**Table 4.** Data quality assessment for the underlying LCA of BBNA LongBay.

| Data Quality Parameter  | Data Quality Discussion   |
|---|---|
| <b>Time-Related Coverage:</b><br>Age of data and the minimum length of time over which data is collected  | The most recent available data are used, based on other considerations such as data quality and similarity to the actual operations. Typically, these data are less than 10 years old (typically 2019 or more recent). All of the data used represented an average of at least one year's worth of data collection. Manufacturer-supplied data (primary data) are based on a full year of operations from at each of the BBNA facilities from July 1, 2022- June 30, 2023.  |
| <b>Geographical Coverage:</b><br>Geographical area from which data for unit processes is collected to satisfy the goal of the study   | The data used in the analysis provide the best possible representation available with current data. Actual processes for upstream operations are primarily North American. Surrogate data used in the assessment are representative of North American operations. Data representative of European operations are considered sufficiently similar to actual processes. Data representing disposal practices are based on regional statistics.  |
| <b>Technology Coverage:</b><br>Specific technology or technology mix  | For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations.  |
| <b>Precision:</b><br>Measure of the variability of the data values for each data expressed  | Precision of results are not quantified due to a lack of data. Data collected for operations were typically averaged for one or more years and over multiple operations, which is expected to reduce the variability of results.  |
| <b>Completeness:</b><br>Percentage of flow that is measured or estimated  | The LCA model included all known mass and energy flows for production of the steel products. In some instances, surrogate data used to represent upstream and downstream operations may be missing some data which is propagated in the model. No known processes or activities contributing to more than 1% of the total environmental impact for each indicator are excluded.   |
| <b>Representativeness:</b><br>Qualitative assessment of the degree to which the data set reflects the true population of interest   | Data used in the assessment represent typical or average processes as currently reported from multiple data sources and are therefore generally representative of the range of actual processes and technologies for production of these materials. Considerable deviation may exist among actual processes on a site-specific basis; however, such a determination would require detailed data collection throughout the supply chain back to resource extraction. For supplier information, the most representative source of data possible was chosen or modeled.  |
| <b>Consistency:</b><br>Qualitative assessment of whether the study methodology is applied uniformly to the various components of the analysis   | <p>The consistency of the assessment is considered to be high within A2 and A3. Data sources of similar quality and age are used with a bias towards Ecoinvent v3.9.1 data.</p> <p>As some of the data taken for upstream production is taken from LCAs or EPDs performed by other practitioners, the consistency between A1 and A2/A3 would be improved with primary data on steelmaking and intermediate steel product manufacture.</p> <p>Different portions of the product life cycle are equally considered; however, it must be noted that final disposition of the product is based on assumptions of current average practices in Europe and North America.</p> |
| <b>Reproducibility:</b><br>Qualitative assessment of the extent to which information about the methodology and data values would allow an independent practitioner to reproduce the results reported in the study | Based on the description of data and assumptions used, this assessment would be reproducible by other practitioners with access to the primary data. All assumptions, models, and data sources are documented.  |
| <b>Sources of the Data:</b><br>Description of all primary and secondary data sources  | Data representing energy use at the BBNA manufacturing facilities represent an annual average and are considered of high quality due to the length of time over which these data are collected, as compared to a snapshot that may not accurately reflect fluctuations in production. The Ecoinvent database is used for secondary LCI datasets. The other EPD data are also considered high quality due to the fact that they similarly span a full calendar year.   |
| <b>Uncertainty of the Information:</b><br>Uncertainty related to data, models, and assumptions  | Uncertainty related to materials in the steel products is low. Actual supplier data for upstream operations was not available for all suppliers and the study relied upon the use of existing representative datasets. These datasets contained relatively recent data (<10 years) but lacked geographical representativeness. Uncertainty related to the impact assessment methods used in the study are high. The impact assessment method required by the PCR includes impact potentials, which lack characterization of providing and receiving environments or tipping points.   |

### 3.7 PERIOD UNDER REVIEW

The period of review for the galvanized steel LongBay produced at the three BBNA facilities is from July 1, 2022 through June 30, 2023.

### 3.8 ALLOCATION

This assessment follows the allocation guidelines of ISO 14044 and allocation rules specified in the PCR and minimized the use of allocation wherever possible. This LCA follows the attributional approach.

Mass allocation was deemed the most accurate and reproducible way of calculating the energy and material requirements for the manufacture of the steel products within BBNA facilities. Primary data for resource use (e.g., electricity, natural gas, water), waste/byproducts, and emissions released, are allocated on a mass-basis as a fraction of total annual production for steel products. Some facilities additionally produce cladding, which is accounted for in the total facility production.

With respect to secondary materials, the 100-0 recycled content approach is used in which the recycled material bears only the burden of any processing from waste material and transportation to the facility.

The transportation from primary producer of material components to the BBNA manufacturing facilities is based on primary data provided by BBNA, including modes, distances, and amount of material transported. Transportation was allocated on the basis of the mass and distance the material was transported.

### 3.9 COMPARABILITY

Full conformance with the PCR for steel products allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards, use the same sub-category Part B PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible.

## 4. LCA: Scenarios and Additional Technical Information

### Manufacturing

Galvanized steel coils and tubes are shipped to three BBNA facilities across North America, including Annville, PA, Monterrey, MX, and St. Joseph, MO. At these facilities, truss chords are cold-formed and bolted to pipes to create a light secondary structure solution. Chords, bolts, and web pipes are assembled using galvanized raw material.

Transportation of waste materials at manufacturing assumes a 20 mile (~32 km) average distance to disposal, consistent with assumptions used in the US EPA WARM model. Hazardous wastes are disposed by incineration.

## 5. LCA: Results

Results of the Life Cycle Assessment are presented below. It is noted that LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

The following environmental impact category indicators are reported using characterization factors based on the U.S. EPA's Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts – TRACI 2.1 and IPCC AR5.

| TRACI 2.1 Impact Category       | Unit                  |
|---------------------------------|-----------------------|
| Global Warming Potential (GWP)* | kg CO <sub>2</sub> eq |
| Ozone Depletion Potential (ODP) | kg CFC 11 eq          |
| Acidification Potential (AP)    | kg SO <sub>2</sub> eq |
| Eutrophication Potential (EP)   | kg N eq               |
| Smog Formation Potential (SFP)  | kg O <sub>3</sub> eq  |
| Fossil Fuel Depletion (FFD)     | MJ Surplus, LHV       |

\*Results presented in this EPD are based on IPCC AR5

These impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes.

The following inventory parameters, specified by the PCR, are also reported.

| Resources  | Unit           | Waste and Outflows   | Unit    |
|--|----------------|--|---------|
| RPR <sub>E</sub> : Renewable primary resources used as energy carrier (fuel)             | MJ, LHV        | HWD: Hazardous waste disposed  | kg      |
| RPR <sub>M</sub> : Renewable primary resources with energy content used as material      | MJ, LHV        | NHWD: Non-hazardous waste disposed   | kg      |
| NRPR <sub>E</sub> : Non-renewable primary resources used as an energy carrier (fuel)     | MJ, LHV        | HLRW: High-level radioactive waste, conditioned, to final repository                   | kg      |
| NRPR <sub>M</sub> : Non-renewable primary resources with energy content used as material | MJ, LHV        | ILLRW: Intermediate- and low-level radioactive waste, conditioned, to final repository | kg      |
| SM: Secondary materials  | kg             | CRU: Components for re-use   | kg      |
| RSF: Renewable secondary fuels   | MJ, LHV        | MR: Materials for recycling  | kg      |
| NRSF: Non-renewable secondary fuels  | MJ, LHV        | MER: Materials for energy recovery   | kg      |
| RE: Recovered energy   | MJ, LHV        | EE: Recovered energy exported from the product system                                  | MJ, LHV |
| FW: Use of net freshwater resources  | m <sup>3</sup> | -  | -       |

**Table 5.** Life Cycle Impact Assessment (LCIA) results for the production-weighted average of the declared unit of LongBay at the three BBNA facilities. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Impact Category             | Life cycle stage      |                       |                       |                       |
|-----------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
|                             | A1                    | A2                    | A3                    | Total (A1-A3)         |
| <b>IPCC AR5</b>             |                       |                       |                       |                       |
| GWP (kg CO <sub>2</sub> eq) | 1,230                 | 211                   | 139                   | 1,580                 |
|                             | 78%                   | 13%                   | 9%                    | 100%                  |
| <b>TRACI 2.1</b>            |                       |                       |                       |                       |
| GWP (kg CO <sub>2</sub> eq) | 1,210                 | 207                   | 130                   | 1,550                 |
|                             | 78%                   | 13%                   | 8%                    | 100%                  |
| ODP (kg CFC-11 eq)          | 3.34x10 <sup>-5</sup> | 4.96x10 <sup>-6</sup> | 2.93x10 <sup>-6</sup> | 4.13x10 <sup>-5</sup> |
|                             | 81%                   | 12%                   | 7%                    | 100%                  |
| AP (kg SO <sub>2</sub> eq)  | 3.84                  | 0.753                 | 0.620                 | 5.22                  |
|                             | 74%                   | 14%                   | 12%                   | 100%                  |
| EP (kg N eq)                | 4.50                  | 0.175                 | 0.478                 | 5.15                  |
|                             | 87%                   | 3%                    | 9%                    | 100%                  |
| SFP (kg O <sub>3</sub> eq)  | 57.7                  | 20.1                  | 12.1                  | 89.9                  |
|                             | 64%                   | 22%                   | 13%                   | 100%                  |
| FFD (MJ Surplus)            | 913                   | 426                   | 191                   | 1,530                 |
|                             | 60%                   | 28%                   | 12%                   | 100%                  |

Comparability: Comparisons cannot be made between product-specific or industry average EPDs at the design stage of a project, before a building has been specified. Comparisons may be made between product-specific or industry average EPDs at the time of product purchase when product performance and specifications have been established and serve as a functional unit for comparison. Environmental impact results shall be converted to a functional unit basis before any comparison is attempted.

Any comparison of EPDs shall be subject to the requirements of ISO 21930. EPDs are not comparative assertions and are either not comparable or have limited comparability when they have different system boundaries, are based on different product category rules or are missing relevant environmental impacts. Such comparison can be inaccurate, and could lead to erroneous selection of materials or products which are higher-impact, at least in some impact categories.


**Table 6.** Resource use and waste flows for the production-weighted average of the declared unit of LongBay at the three BBNA facilities. Results reported in MJ are calculated using lower heating values. All values are rounded to three significant digits.

| Parameter              | Life cycle stage |       |       |               |
|------------------------|------------------|-------|-------|---------------|
|                        | A1               | A2    | A3    | Total (A1-A3) |
| <b>Resources</b>       |                  |       |       |               |
| RPR <sub>E</sub> (MJ)  | 2,830            | 69.6  | 353   | 3,250         |
|                        | 87%              | 2%    | 11%   | 100%          |
| RPR <sub>M</sub> (MJ)  | 0.00             | 0.00  | 235   | 235           |
|                        | 0%               | 0%    | 100%  | 100%          |
| NRPR <sub>E</sub> (MJ) | 13,300           | 3,140 | 1,730 | 18,200        |
|                        | 73%              | 17%   | 10%   | 100%          |
| NRPR <sub>M</sub> (MJ) | 0.00             | 0.00  | 0.00  | 0.00          |
|                        | n/a              | n/a   | n/a   | n/a           |
| SM (kg)                | 1,080            | 0.00  | 0.00  | 1,080         |
|                        | 100%             | 0%    | 0%    | 100%          |
| RSF/NRSF (MJ)          | 0.00             | 0.00  | 0.00  | 0.00          |
| RE (MJ)                | 0.00             | 0.00  | 0.00  | 0.00          |
| FW (m <sup>3</sup> )   | 17.8             | 0.373 | 0.516 | 18.7          |
|                        | 95%              | 2%    | 3%    | 100%          |
| <b>Wastes</b>          |                  |       |       |               |
| HWD (kg)               | 0.0              | 0.0   | 0.242 | 0.242         |
|                        | 0.0%             | 0.0%  | 100%  | 100%          |
| NHWD (kg)              | 0.0              | 0.0   | 2.51  | 2.51          |
|                        | n/a              | n/a   | 100%  | 100%          |
| HLRW (kg)              | 0.0              | 0.0   | 0.0   | 0.0           |
|                        | n/a              | n/a   | n/a   | n/a           |
| ILLRW (kg)             | 0.0              | 0.0   | 0.0   | 0.0           |
|                        | n/a              | n/a   | n/a   | n/a           |
| CRU (kg)               | 0.0              | 0.0   | 0.0   | 0.0           |
| MR (kg)                | 0.0              | 0.0   | 104   | 104           |
|                        | 0.0%             | 0.0%  | 100%  | 100%          |
| MER (kg)               | 0.0              | 0.0   | 0.0   | 0.0           |
| EE (MJ)                | 0.0              | 0.0   | 0.0   | 0.0           |

The PCR requires the calculation of biogenic carbon emissions and removals. No biogenic carbon is associated with the product. However, wood-based dunnage material is used in packaging. The biogenic carbon removal associated with the packaging is 10.1 kg CO<sub>2</sub> / ton LongBay; emissions are not included as packaging end of life is outside the scope.

## 6. LCA: Interpretation

The contributions to total impact indicator results are dominated by the upstream production of raw materials and steelmaking (A1). The transportation of materials to the facilities (A2) is generally the second-greatest contributing module except for eutrophication for which manufacturing (A3) is the second-greatest contributing module.

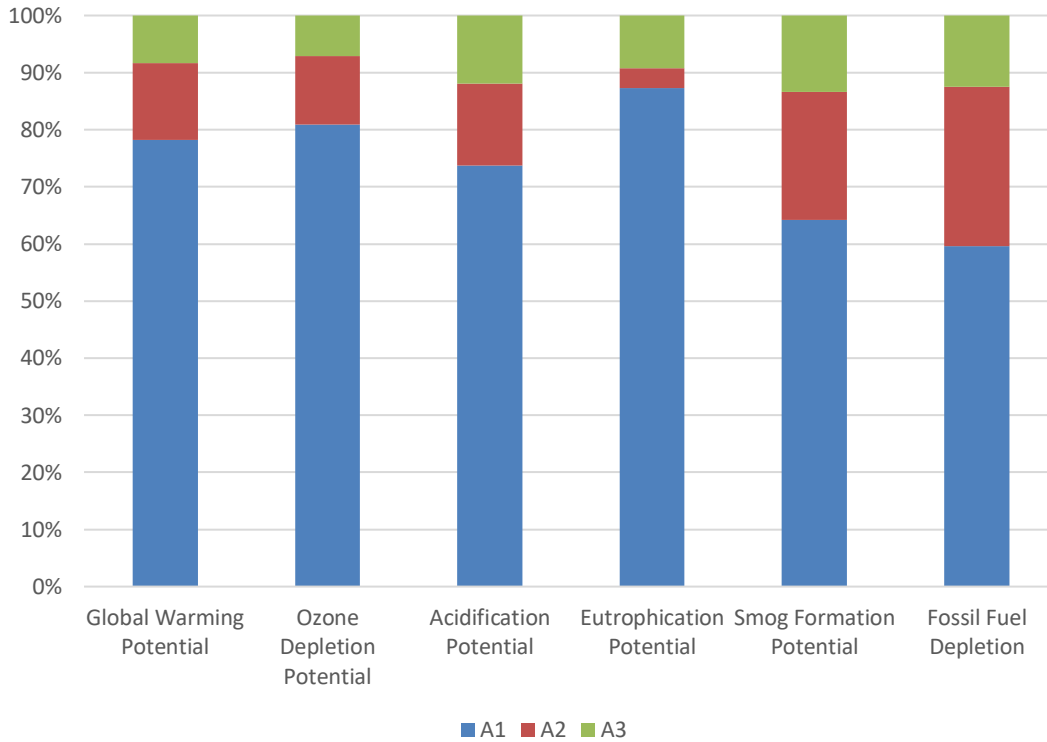

**Figure 2.** Contribution analysis for the production-weighted average of the declared unit of BBNA LongBay across the three facilities.

### Limitations

Primary data of material components could not be modeled with actual process information. Secondary data consists of ecoinvent datasets and impact assessment results taken from supplier LCA and EPDs. Hot dipped galvanization was additionally modeled based on the AISI report on semi-finished steel products.

The environmental impact results of steel products in this document are based on a declared unit and therefore do not provide sufficient information to establish comparisons. The results shall not be used for comparisons without knowledge of how the physical properties of the steel product impact the precise function at the construction level. The environmental impact results shall be converted to a functional unit basis before any comparison is attempted. See Section 3.8 of the Part B Designated Steel Construction Product PCR for additional EPD comparability guidelines.

## 7. Additional Environmental Information

**Manufacturing:** Throughout North America, BlueScope Buildings North America, Inc. facilities are recognized as an IAS AC-472 accredited metal building manufacturer. The IAS accreditation program recognizes manufacturers who design and fabricate safe, high-quality structures. The rigorous certification process scrutinizes all of the things that are important to you in selecting a manufacturer, including raw material purchasing, welding practices, material receiving, quality control measures and overall fabrication quality assurance.

Many of BlueScope Buildings North America's global products meet Factory Mutual design requirements and meet regional snow and hurricane codes.

**Commitment to product quality:** In 1959, we opened the doors to our Research and Development Center, a dedicated space for product development and testing. Today, it is home to the industry's only privately owned Guarded Hot Box, a testing apparatus to quantify energy efficiency. We also have numerous other tests focused on product strength, efficiency and longevity:

- Full-scale load tests for frames, beams, LongBay and more complex structures,
- An acid rain test that accelerates the effect of acid rain and other acidic environments in order to predict the long-term performance of a material,
- A wind uplift test to verify roof panels perform in accordance with Factory Mutual, Corps of Engineers, Underwriters Laboratories and ASTM E1592 test specifications,
- A 1,000-hour paint test that simulates 15 to 20 years of sunlight and dew accumulation, and
- Real-time tests to validate paint performance for 25 years or longer.

It's because of this unique space, and the people who work in it, that we have a unique perspective on how to build some of the strongest and longest-lasting buildings in the industry.

## 8. References

- Life Cycle Assessment of Steel Primary Framing, Secondary Framing and LongBay for BlueScope Buildings North America, Inc. SCS Global Services Report. Prepared for BlueScope Buildings North America, Inc. April 2024.
- ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
- ISO 14040: 2006/Amd 1 2020 Environmental Management – Life cycle assessment – Principles and Framework
- ISO 14044: 2006/AMD 1:2017/ AMD 2:2020 Environmental Management – Life cycle assessment – Requirements and Guidelines.
- Life Cycle Inventories of North American Steel Products. sphera on behalf of AISI. 2020.
- PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 4.0. UL Environment. March 2022.
- PCR Guidance for Building-Related Products and Services Part B: Designated Steel Construction Product EPD Requirements. UL Environment. August 2020.
- SCS Type III Environmental Declaration Program: Program Operator Manual. V12.0 December 2023. SCS Global Services.
- sphera on behalf of AISI. 2020. Life Cycle Inventories of North American Steel Products.
- Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI). Dr. Bare, J., <https://www.epa.gov/chemical-research/tool-reduction-and-assessment-chemicals-and-other-environmental-impacts-traci>
- United States Environmental Protection Agency (EPA). (2023). Emissions & Generation Resource Integrated Database (eGRID), 2021. Washington DC: Office of Atmospheric Protection, Clean Air Markets Division. <https://www.epa.gov/egrid>.
- Ecoinvent Centre (2022) ecoinvent data from v3.9.1. Swiss Center for Life Cycle Inventories, Dübendorf, 2022, <http://www.ecoinvent.org>
- European Joint Research Commission. International Reference Life Cycle Data System handbook. *General guide for Life Cycle Assessment – Detailed Guidance*. © European Union, 2010.
- “WARM Model Transportation Research – Draft.” Memorandum from ICF Consulting to United States Environmental Protection Agency. September 7, 2004. <http://epa.gov/epawaste/conserva/tools/warm/SWMGHGreport.html#background>.

For more information, contact:



**BlueScope Buildings North America, Inc.**

1540 Genessee St  
Kansas City, MO 64102  
(816) 968-3001 | [info@bsbna.com](mailto:info@bsbna.com)  
<https://bluescopebuildings.com/>



**SCS Global Services**

2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA  
Main +1.510.452.8000 | fax +1.510.452.8001